


Technical data of FNV type condenser


FNV型冷凝器技术参数

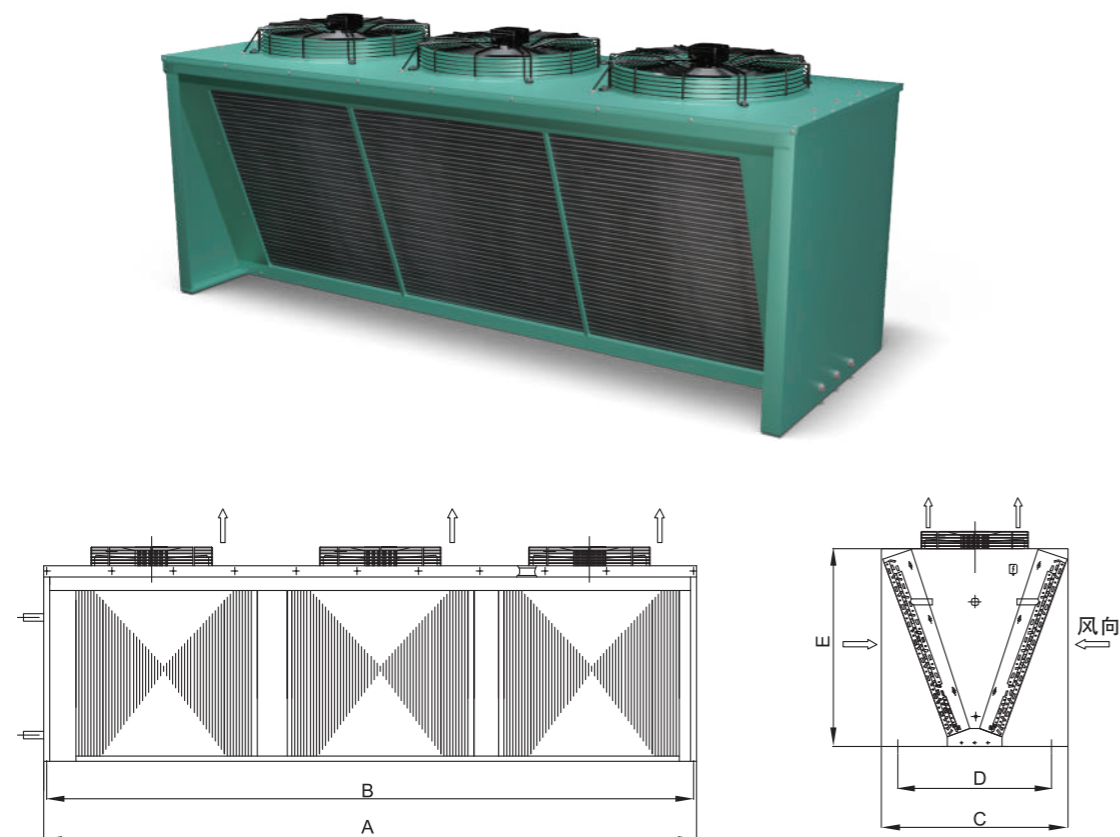

型号 Model	换热量 Heat exchange capacity (KW)	换热 面积 Heat exchange area(m ²)	风机 Fan				接口管径 Diameter of connection pipe(mm)		外形尺寸 Dimension(mm)				
			功率 Power W	直径Φ Fordiameter	风量 Air flow(m ³ /h)	电压V Voltage	进管 Inlet	出管 Outlet	A	B	C	D	E
FNV-17.7/60	17.7	60	2*230	Φ400	2*4000	380	22	16	1090	1050	705	505	580
FNV-23.6/80	23.6	80	2*280	Φ450	2*4700	380	25	19	1300	1260	740	540	625
FNV-29.5/100	29.5	100	2*460	Φ500	2*6640	380	25	19	1340	1300	810	610	720
FNV-35.4/120	35.4	120	2*460	Φ500	2*6640	380	25	19	1340	1300	910	710	860
FNV-41.3/140	41.3	140	2*650	Φ550	2*8660	380	28	19	1520	1480	910	710	860
FNV-44.3/160	44.3	160	2*860	Φ600	2*10655	380	28	22	1720	1680	910	710	860
FNV-47/180	47	180	2*860	Φ600	2*10655	380	28	22	1720	1680	980	775	955
FNV-52.5/200	52.5	200	2*860	Φ600	2*10655	380	28	22	1850	1810	980	775	955
FNV-58.5/220	58.5	220	2*860	Φ600	2*10655	380	32	22	2000	1960	980	775	955
FNV-64.5/240	64.5	240	3*650	Φ550	3* 8660	380	32	22	2200	2160	980	775	955
FNV-70.5/260	70.5	260	3*860	Φ600	3*10655	380	32	22	2400	2360	980	775	955
FNV-76/280	76	280	3*860	Φ600	3* 10655	380	35	28	2500	2460	1015	815	1005
FNV-82.5/300	82.5	300	3*860	Φ600	3*10655	380	35	28	2500	2460	1050	845	1050
FNV-88.5/320	88.5	320	3*860	Φ600	3*10655	380	35	28	2650	2610	1050	845	1050
FNV-97.3/360	97.3	360	3*860	Φ600	3*10655	380	42	28	2650	2610	1120	910	1140
FNV-112/400	112	400	4*860	Φ600	4*10655	380	42	28	3200	3160	1050	845	1050
FNV-136/480	136	480	4*860	Φ600	4*10655	380	54	28	3500	3460	1120	910	1140

Technical data of FNVT box type condense

FNVT箱式冷凝器技术参数

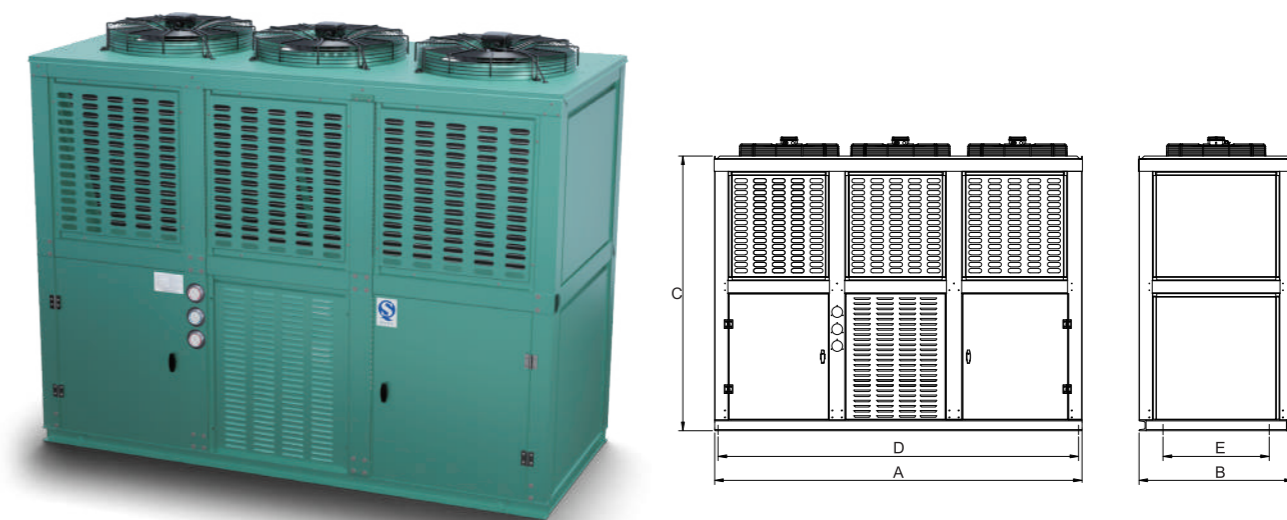

型号 Model	换热量 Heat exchange capacity (KW)	换热 面积 Heat exchange area(m ²)	风机 Fan				接口管径 Diameter of connection pipe(mm)		外形尺寸 Dimension(mm)				
			功率 Power W	直径Φ Fordiameter	风量 Air flow(m ³ /h)	电压V Voltage	进管 Inlet	出管 Outlet	A	B	C	D	E
FNVT-17.7/60	17.7	60	2*230	Φ400	2*4000	380	22	16	1090	800	1280	1060	530
FNVT-23.6/80	23.6	80	2*280	Φ450	2*4700	380	25	19	1300	800	1330	1270	530
FNVT-29.5/100	29.5	100	2*460	Φ500	2*6640	380	25	19	1340	850	1430	1310	580
FNVT-35.4/120	35.4	120	2*460	Φ500	2*6640	380	25	19	1340	850	1530	1310	580
FNVT-41.3/140	41.3	140	2*650	Φ550	2*8660	380	28	19	1520	900	1530	1490	630
FNVT-44.3/160	44.3	160	2*860	Φ600	2*10655	380	28	22	1720	950	1530	1690	680
FNVT-47/180	47	180	2*860	Φ600	2*10655	380	28	22	1720	950	1630	1690	680
FNVT-52.5/200	52.5	200	2*860	Φ600	2*10655	380	28	22	1850	950	1630	1820	730
FNVT-58.5/220	58.5	220	2*860	Φ600	2*10655	380	35	22	2000	950	1630	1970	730
FNVT-64.5/240	64.5	240	3*650	Φ550	3* 8660	380	35	22	2200	950	1630	2170	680
FNVT-70.5/260	70.5	260	3*860	Φ600	3*10655	380	35	22	2400	950	1630	2370	680
FNVT-76/280	76	280	3*860	Φ600	3* 10655	380	35	28	2500	950	1630	2470	680
FNVT-82.5/300	82.5	300	3*860	Φ600	3*10655	380	35	28	2500	1000	1780	2470	730
FNVT-88.5/320	88.5	320	3*860	Φ600	3*10655	380	35	28	2650	1000	1780	2620	730
FNVT-97.3/360	97.3	360	3*860	Φ600	3*10655	380	42	28	2650	1100	1880	2620	830
FNVT-112/400	112	400	4*860	Φ600	4*10655	380	42	28	3200	1000	1780	3170	730
FNVT-136/480	136	480	4*860	Φ600	4*10655	380	54	28	3500	1100	1880	3470	830